

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G. F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperture Range: -55° C to +125° C




F334-12XXXXXMUX1



F334-12XXXXXMUX2








F334-12XXXXXMUX3







F334-12XXXXXMUX4





Mating With/配對公座:
P308/P310/P315/P316/P320/P325
B357

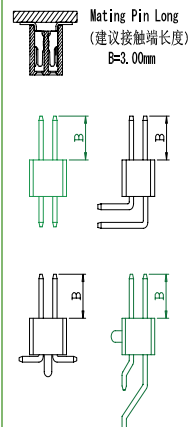





TYPE 1



TYPE 3



TYPE 2



TYPE 4

F 3 3 4 - 1 2

X X

X X

X

X

U

X

X

No.Of Pins Per Row
02~50P

Contact Plating
Full Of Gold A0=0.8u"
Semi-Gold B0=0.8u"

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Contact Shape:
M:SMT

Packing
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Journal Number
1:Type1
2:Type2
3:Type3
4:Type4

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Http://www.yxcon.com

E-mail:yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933

FAX:+86 769 85396015
FAX:+886 3313 2935